

Installation instructions

Mini

Cooper / Cooper S / JCB



14110200

The product described in the guidance was developed, manufactured and controlled considering the necessary safety requirements.

The product must be installed properly to ensure a proper function and avoid danger for persons and things.

Please read this installation guide inclusive safety instructions carefully.

Scope of supply:

Quantity	article
1x	Tuningbox
1x	loom
1x	Bridge plug
1x	Fastening kit



1. Open the hood.
2. Turn the ignition off!
3. Remove the ignition key!
4. Close and lock all doors!
5. Do not open any doors while installing the tuning kit!
6. Wait 5 minutes before beginning the installation



In order to avoid damages at electronic vehicle components, you have to be sure that you have done all necessary methods for **electrostatic discharge**.

Install the electronic in an **waterproof** and **vibrationless** place. Do not make any changes at the tuning kit!

Do not expand or shorten the loom.

Installation instructions


Mini

Cooper / Cooper S / JCB



14110200

overview

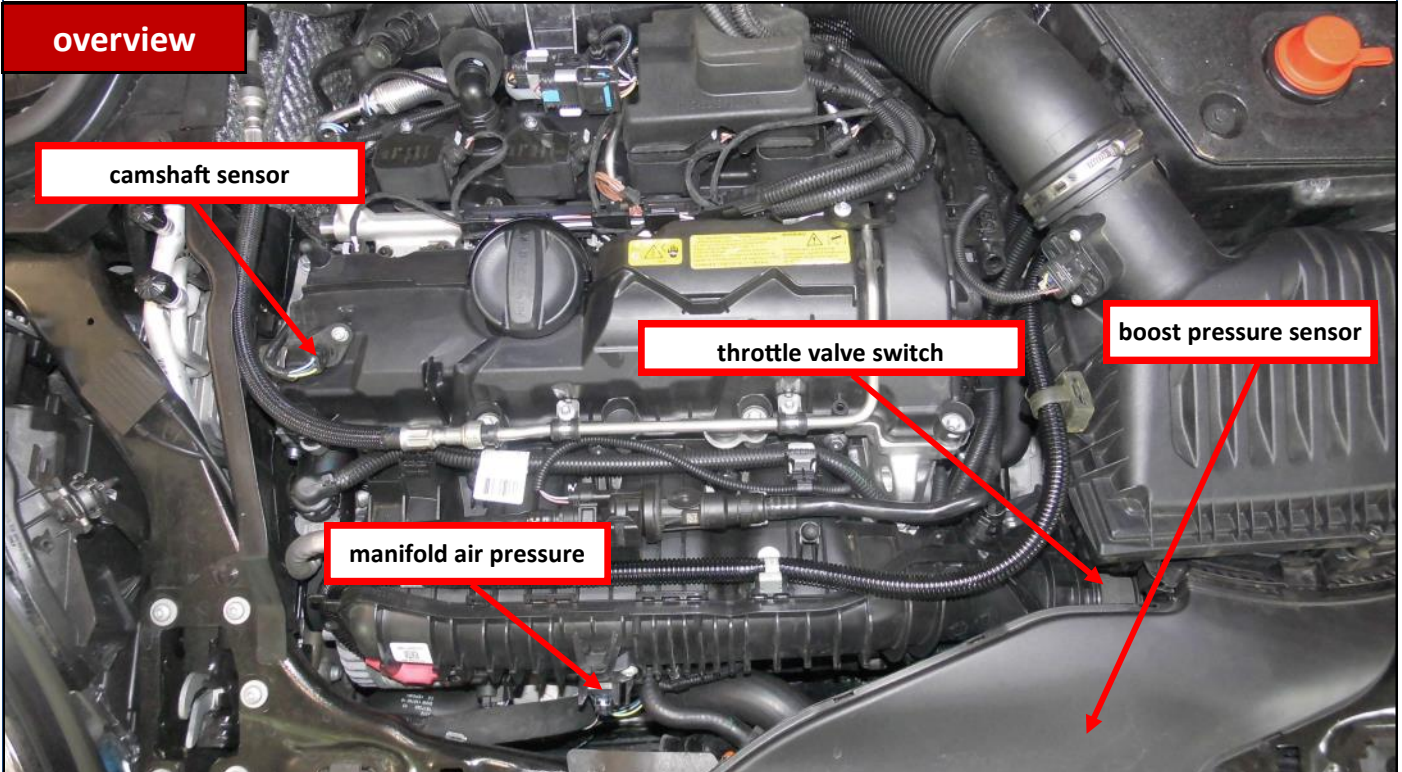

overview:

The chiptuning box is attached to the following points:

- camshaft position sensor
- boost pressure sensor
- throttle valve switch
- Manifold air pressure

Necassary tools:

- Cutters, socket wrench

Preparation:

- Move the individual strands of the cable loom to the associated plug connectors
- Put the necessary tool for the side (if needs)
- Put the mounting material to the side
- ***To reach the maximum power min. Super Unleaded (98 RoZ) or better has to be refueled***


Installation instructions

Mini

Cooper / Cooper S / JCB




1a

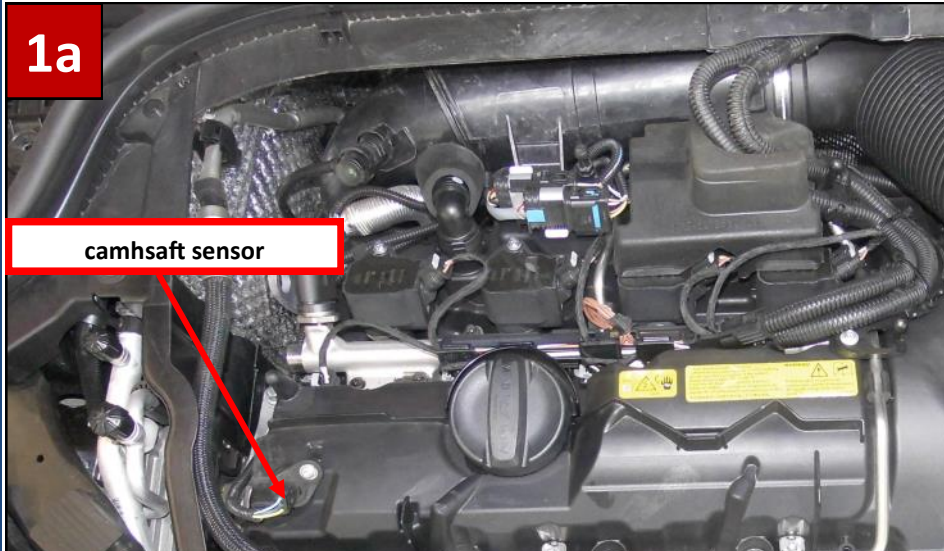


1. camshaft sensor

- ◇ Disconnect the plug from the camshaft sensor.
- ◇ Attach the camshaft sensor plug to the new loom.
- ◇ Connect the plug of the new loom to the camshaft sensor.

1b

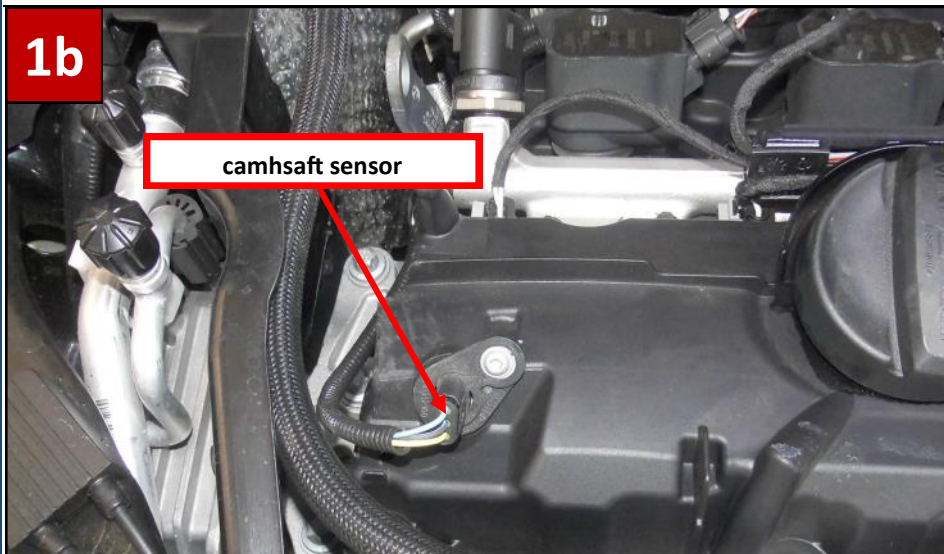

plug in the correct position

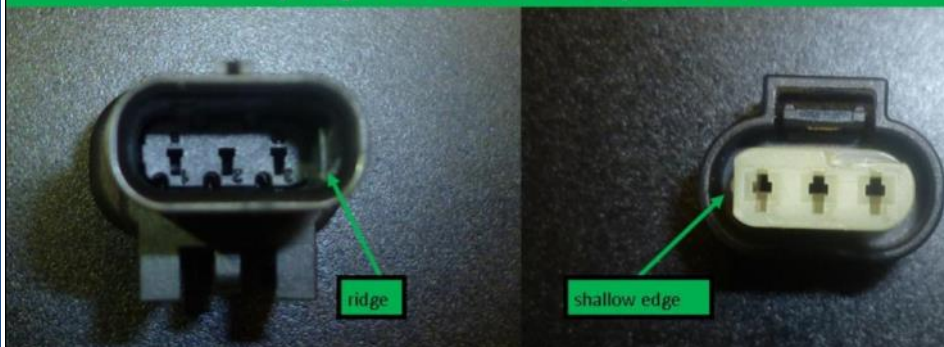

- ◇ The plug must be as show on the picture will be with the shallow edge on the side of the ridge.
- ◇ With some higher force, it is possible to push the plug with the round side on the ridge!!!



Installation instructions


Mini

Cooper / Cooper S / JCB



14110200


2a

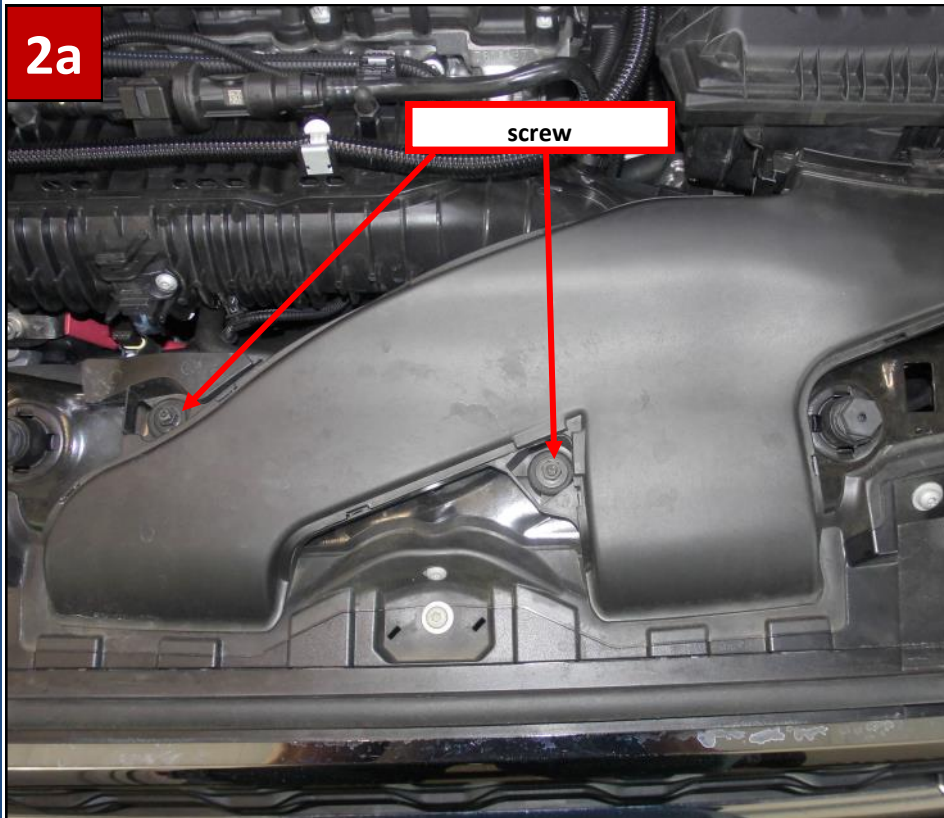

2. boost pressure sensor

- ◇ To get to the throttle valve switch and the boost pressure sensor, the cover must be removed.
- ◇ To do this, remove the two screws with a socket wrench.
- ◇ Carefully remove the cover.

2b

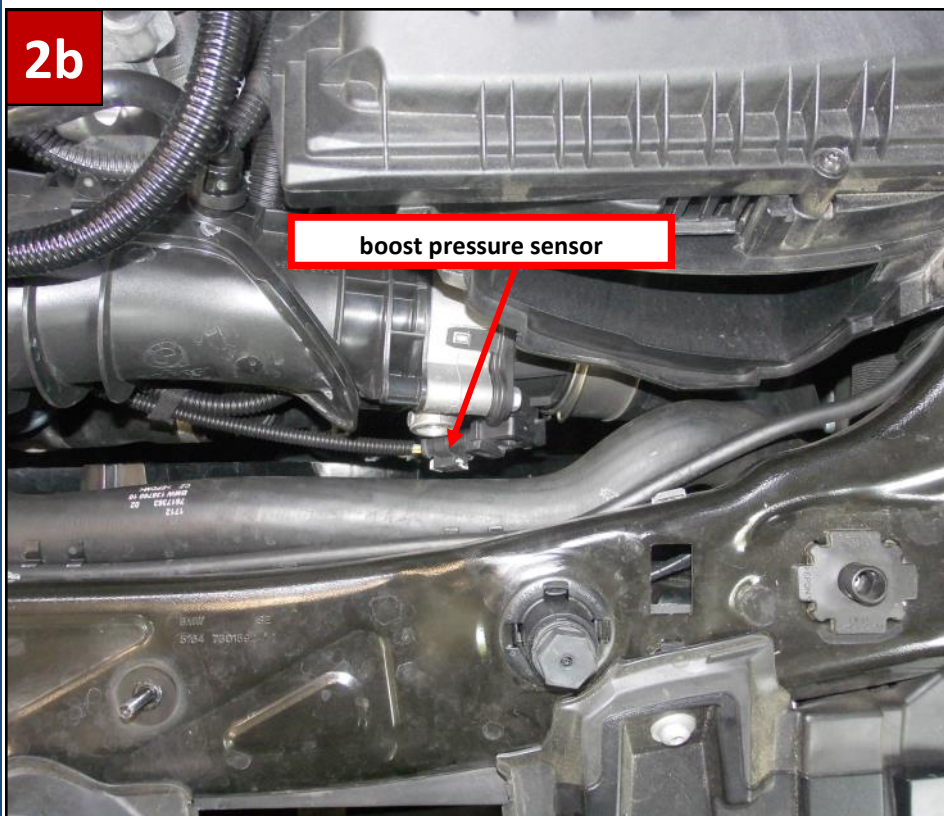


- ◇ Disconnect the plug from the boost pressure sensor.
- ◇ Attach the boost pressure sensor plug to the new loom.
- ◇ Connect the plug of the new loom to the boost pressure.

Installation instructions


Mini

Cooper / Cooper S / JCB



14110200


3a

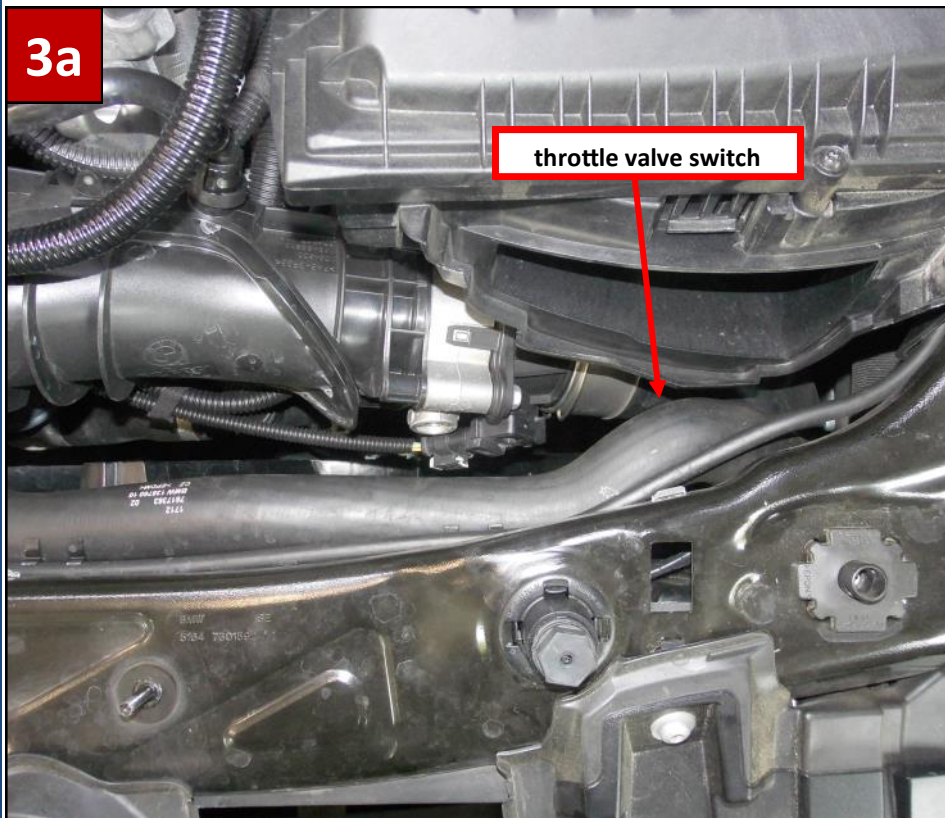

3. throttle valve switch

- ◇ The throttle valve switch is located below the air filter box.
- ◇ Disconnect the plug from the throttle valve switch.
- ◇ Attach the throttle valve switch plug to the new loom.
- ◇ Connect the plug of the new loom to the throttle valve switch.

3b

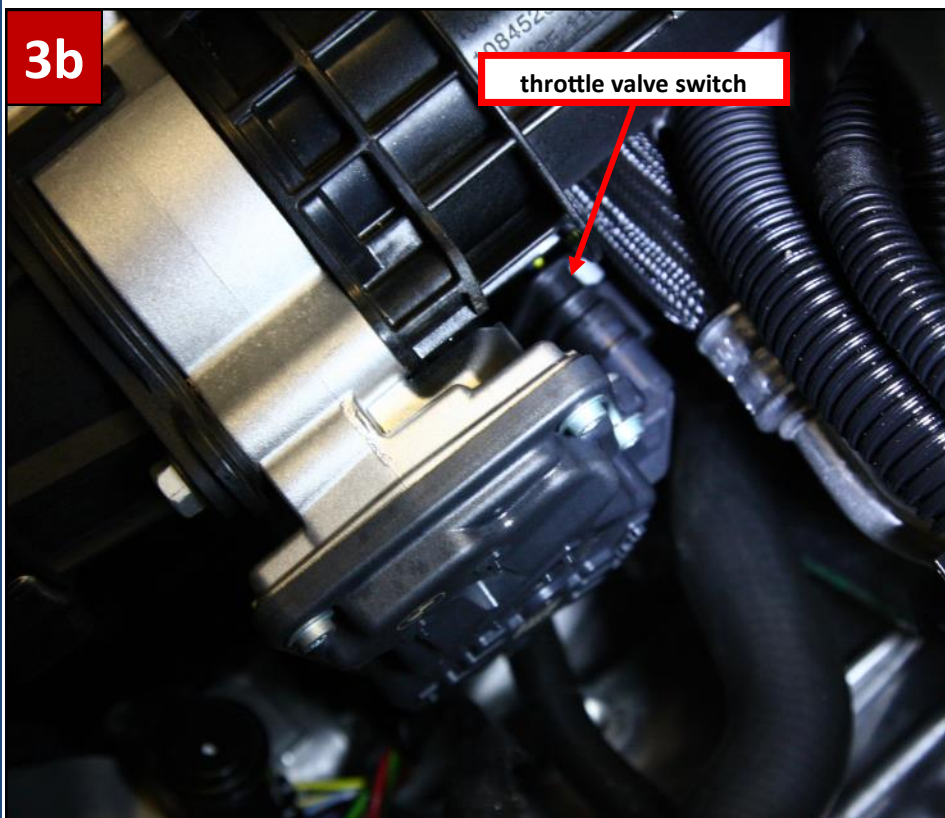

Installation instructions

Mini

Cooper / Cooper S / JCB



14110200


4a




4. manifold air pressure

- ◇ Disconnect the plug from the manifold air pressure sensor.
- ◇ Attach the manifold air pressure plug to the new loom.
- ◇ Connect the plug of the new loom to the manifold air pressure.

4b

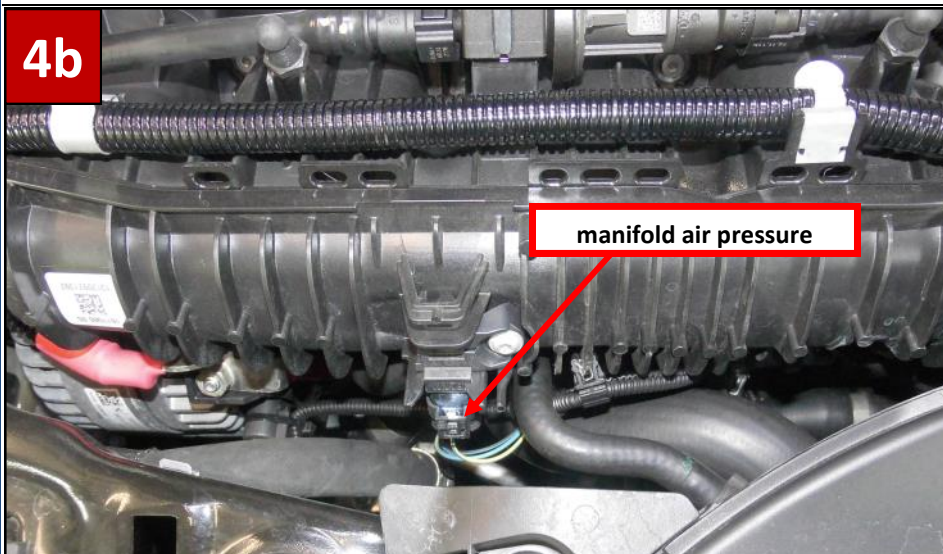

plug in the correct position

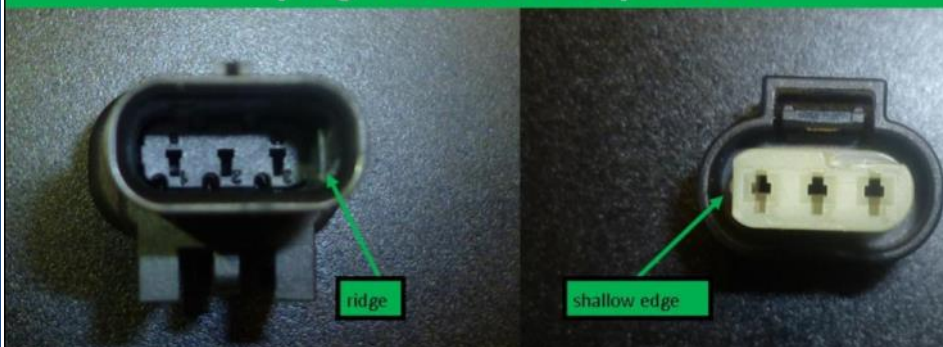


- ◇ The plug must be as show on the picture will be with the shallow edge on the side of the ridge.
- ◇ With some higher force, it is possible to push the plug with the round side on the ridge!!!



Installation instructions


Mini

Cooper / Cooper S / JCB



14110200


5

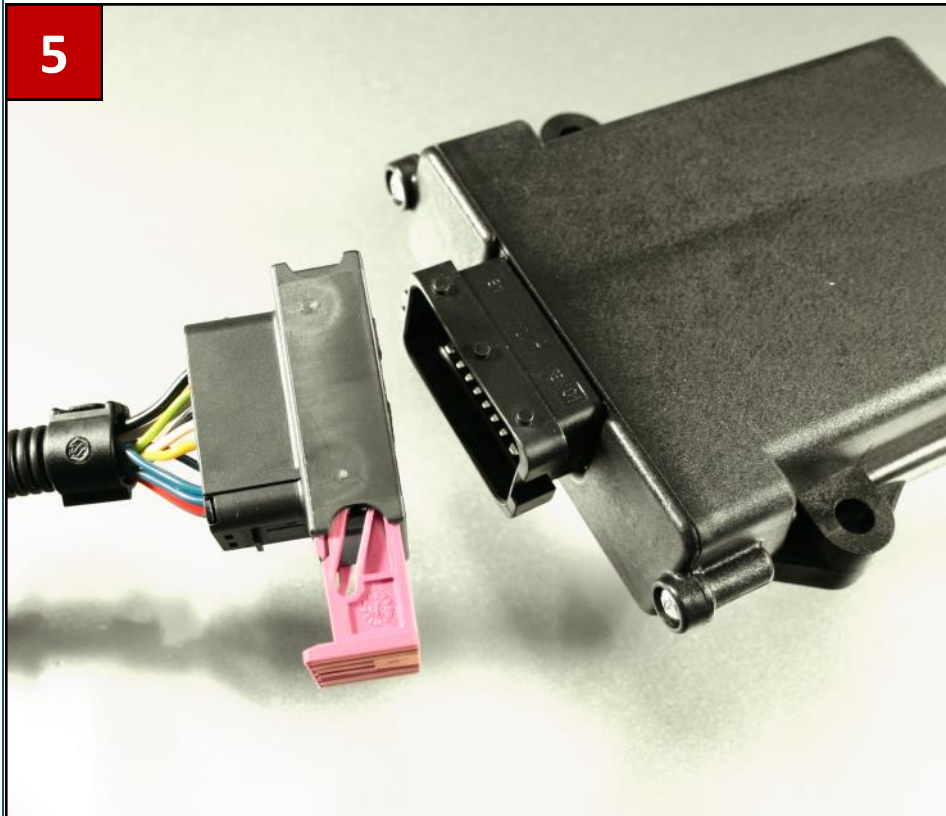

5. tuningbox

- ◇ Finally install the cable towards a suitable position
- ◇ The plugs must be engaged, so that a safe connection is ensured
- ◇ Fix the cable with cable ties
- ◇ Connect the tuningbox to the new loom

6

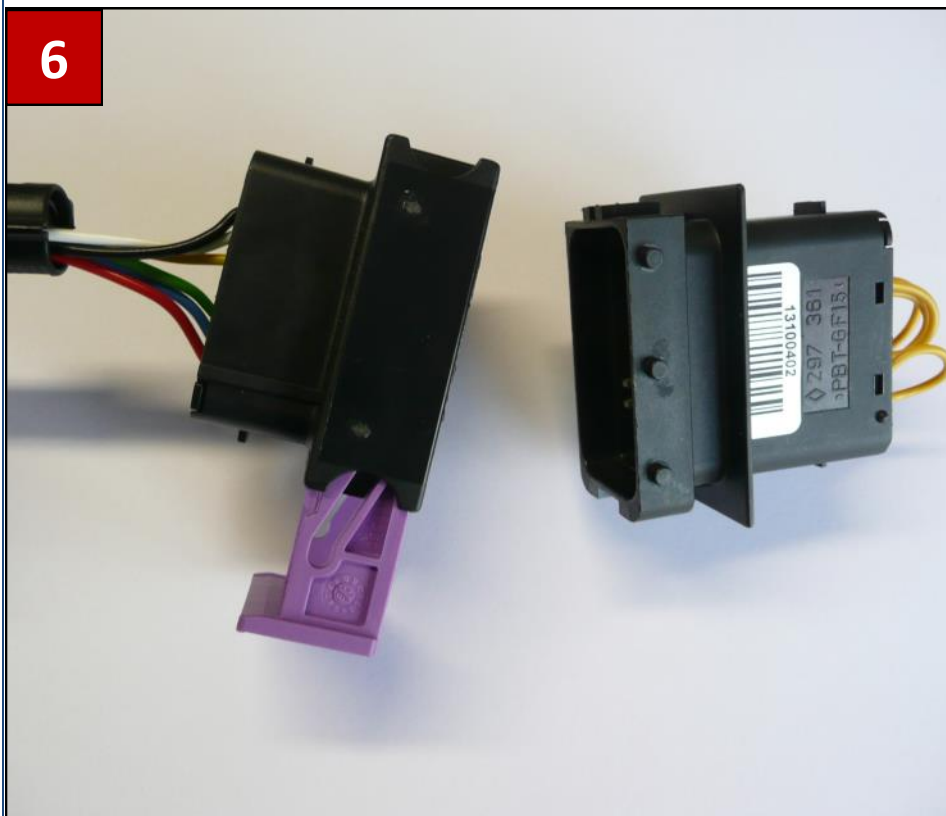

6. jumper plug

- ◇ By using the jumper the vehicle is put in the original condition.
- ◇ As soon as you connect the cable loom with the jumper plug the car is in original condition.