

# INSTALLATIONGUIDE

Alfa Romeo / Fiat / Lancia  
1.4 16V T-Jet



14101819


The product described in the guidance was developed, manufactured and controlled considering the necessary safety requirements.

The product must be installed properly to ensure a proper function and avoid danger for persons and things.

Please read this installationguide inclusive safety instructions carefully.

## Scope of supply:

Quantity	article
1x	Tuningbox
1x	loom
1x	Bridge plug
1x	Fastening kit

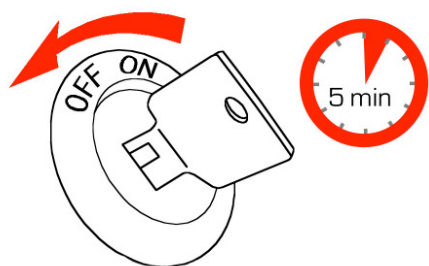

1. Open the hood.
2. Turn the ignition off!
3. Remove the ignitionkey!
4. Close and lock all doors!
5. Do not open any doors while installing the tuningkit!
6. Wait 5 minutes before beginning the installation



In order to avoid damages at electronic vehicle components, you have to be sure that you have done all necessary methods for **electrostatic discharge** .

Install the electronic in an **waterproof** and **vibrationless** place. Do not make any changes at the tuning-kit!

Do not expand or shorten the loom.

# INSTALLATIONGUIDE

Alfa Romeo / Fiat / Lancia  
1.4 16V T-Jet



14101819

## Overview

INTAKE MANIFOLD PRESSURE

BOOST PRESSURE

CAM SHAFT

### Overview:

The tuningkit has to be attached to the following points:

- **Boost pressure sensor**
- **Intake manifold pressure sensor**
- **Cam shaft sensor (under the engine cover)**

### Required tools:

- **Screwdriver**

### Vorbereitung:

- Move the individual strands of the loom to the associated plug connectors
- Put the required tools by your side ( if needed )
- Take the fastening material at your side
- ***To get the maximum power enhancement , you have to use „super plus“ (98 ROZ)***


# INSTALLATIONGUIDE

Alfa Romeo / Fiat / Lancia  
1.4 16V T-Jet



14101819


1

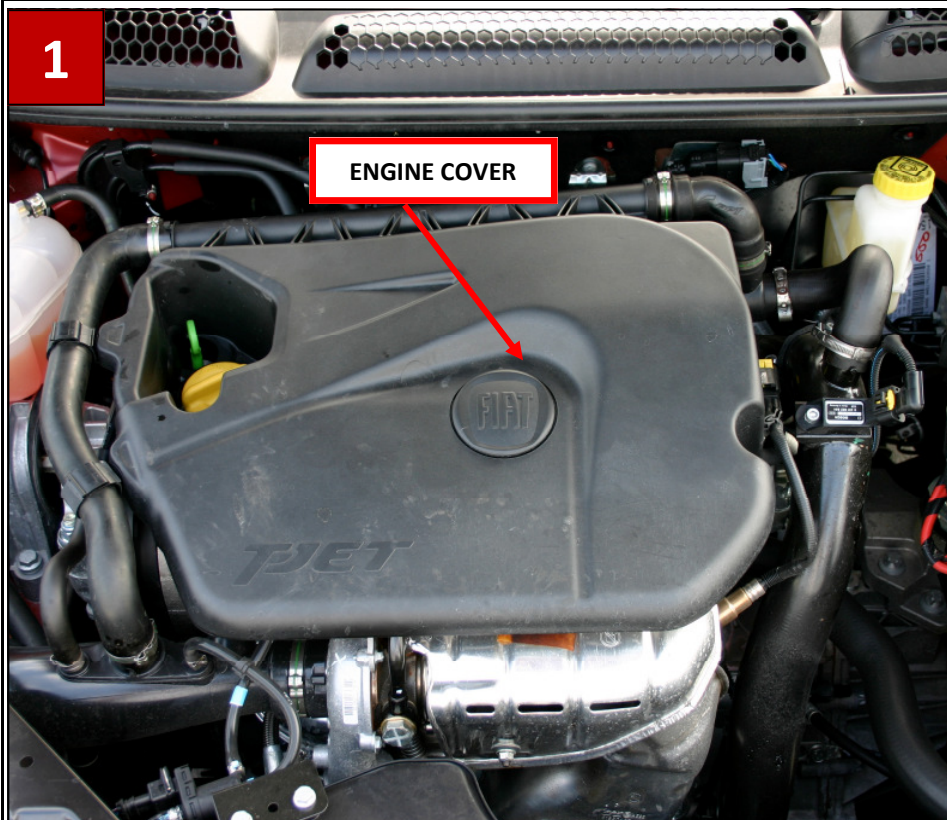

## 1. Preperation

- ◇ Before you could begin installing the tuningkit, you have to remove the engine cover.
- ◇ The engine cover is fixed with clips

2

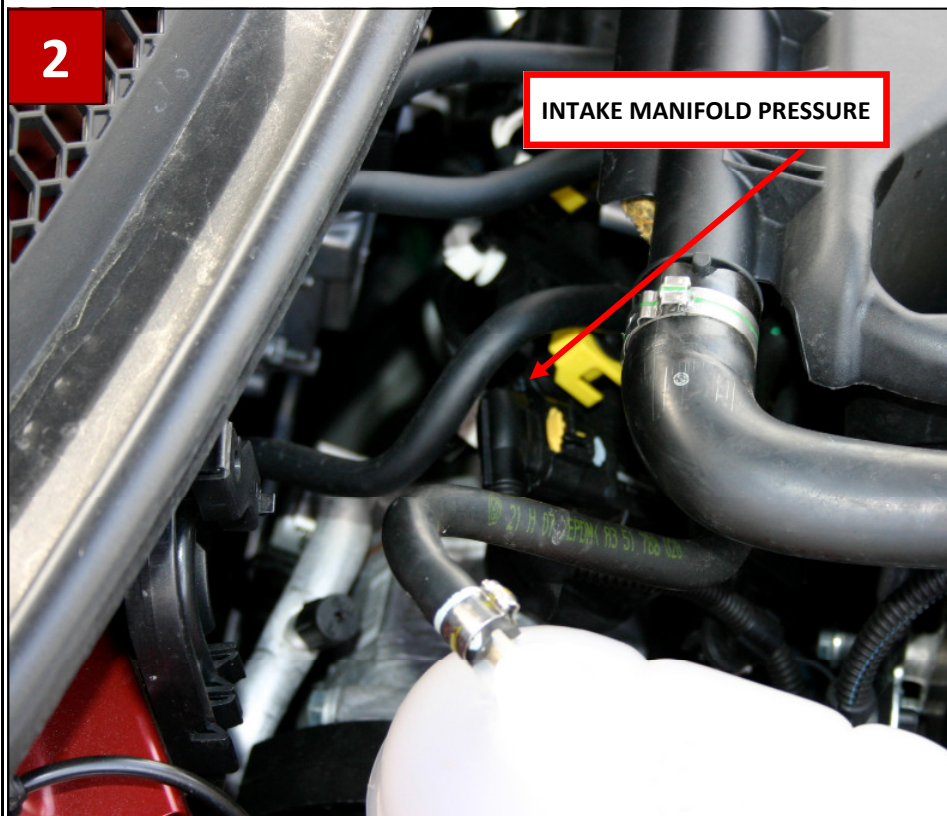

## 2. Intake manifold pressure

- ◇ Disconnect the plug from the manifold air pressure sensor.
- ◇ Attach the manifold air pressure plug to the new loom
- ◇ Connect the plug of the new loom the manifold air pressure sensor



# INSTALLATIONGUIDE


Alfa Romeo / Fiat / Lancia  
1.4 16V T-Jet



14101819

3


CAM SHAFT SENSOR

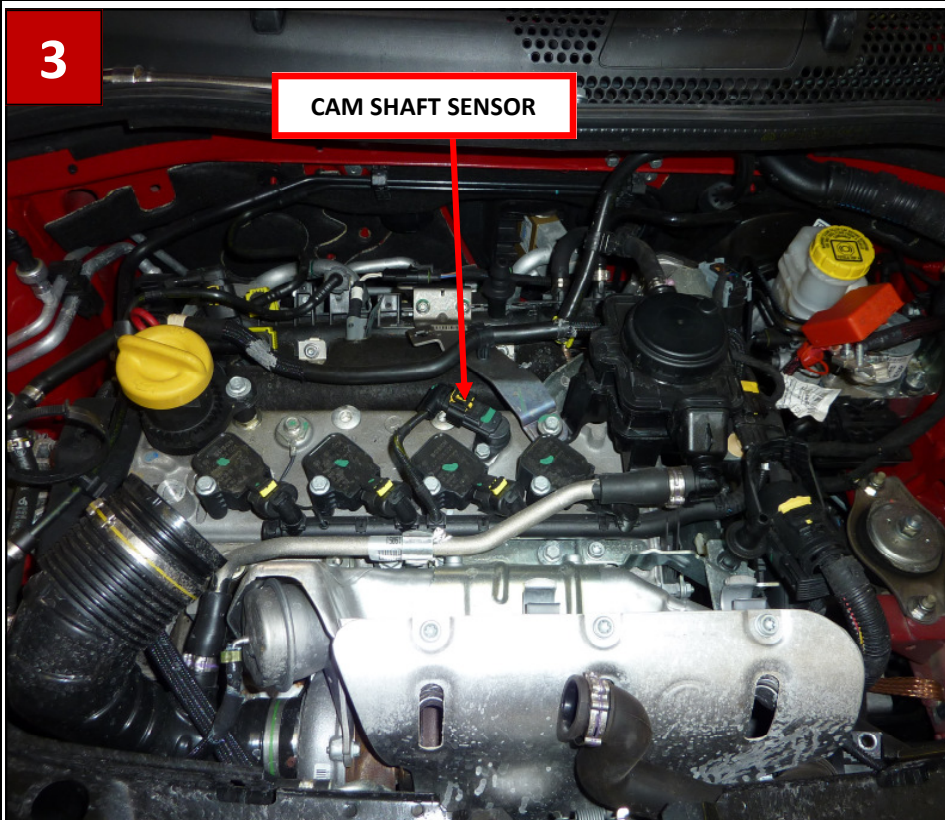

## 3. Cam shaft sensor

- ◇ Disconnect the plug from the cam shaft sensor.
- ◇ Attach the cam shaft sensor plug to the new loom
- ◇ Connect the plug of the new loom the cam shaft sensor

BOOST PRESSURE SENSOR

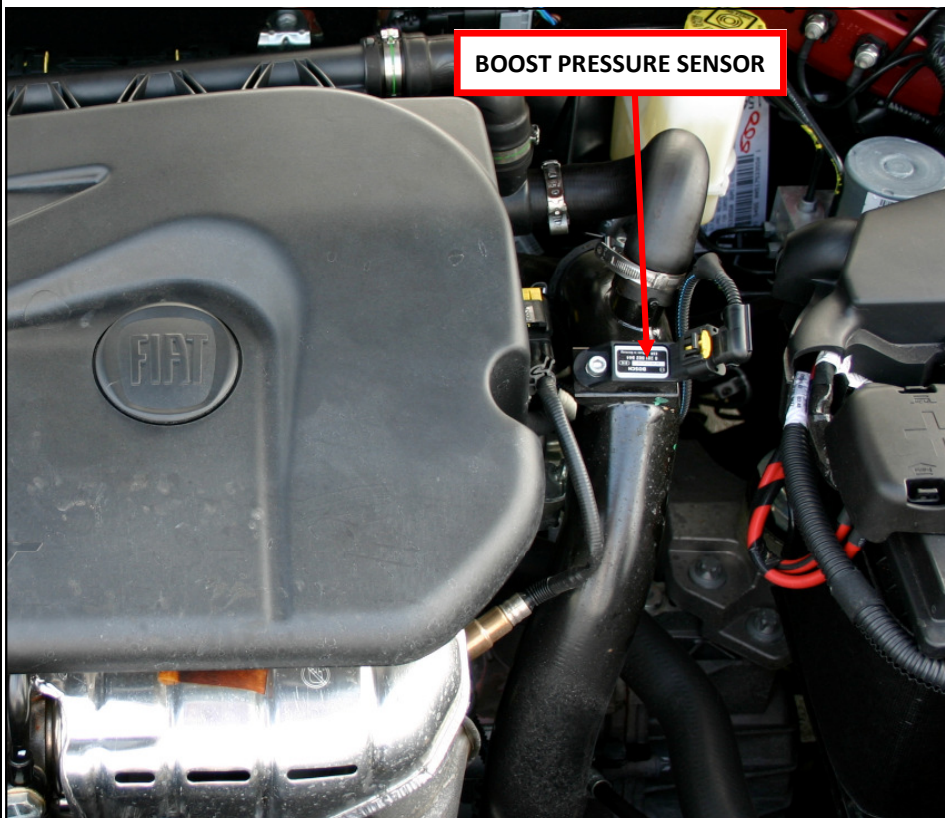

## 4. Boost pressure sensor

- ◇ Disconnect the plug from the boost pressure sensor.
- ◇ Attach the boost pressure sensor plug to the new loom
- ◇ Connect the plug of the new loom the boost pressure sensor


# INSTALLATIONGUIDE

Alfa Romeo / Fiat / Lancia  
1.4 16V T-Jet



14101819

5

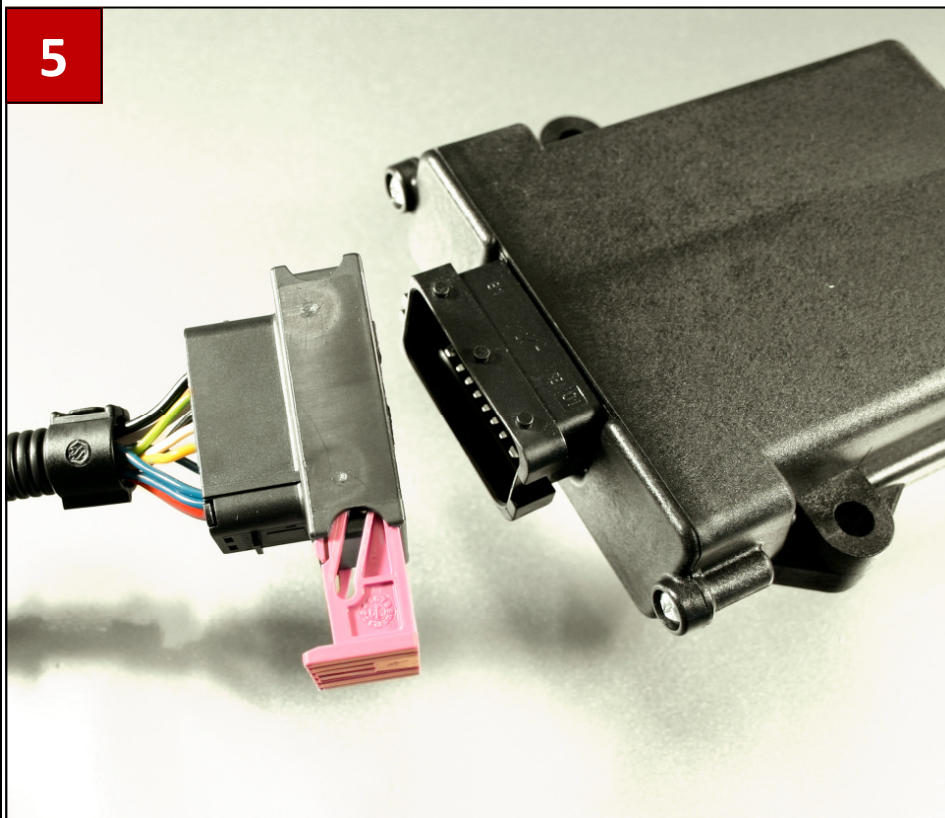

## 5. Tuningbox

- ◇ Finally install the cable towards a suitable position
- ◇ The plugs must be engaged, so that a safe connection is ensured
- ◇ Fix the cable with cable ties
- ◇ Connect the tuningbox to the new loom