

Installation instructions

Toyota
2.8 D4D



14110477

The product described in the guidance was developed, manufactured and controlled considering the necessary safety requirements.

The product must be installed properly to ensure a proper function and avoid danger for persons and things.

Please read this installation guide inclusive safety instructions carefully.

Scope of supply:

Quantity	article
1x	Tuningbox
1x	Loom
1x	Bridge plug
1x	Fastening kit



1. Open the hood.
2. Turn the ignition off!
3. Remove the ignition key!
4. Close and lock all doors!
5. Do not open any doors while installing the tuning kit!
6. Wait 5 minutes before beginning the installation



In order to avoid damages at electronic vehicle components, you have to be sure that you have done all necessary methods for **electrostatic discharge**.

Install the electronic in an **waterproof** and **vibrationless** place. Do not make any changes at the tuning-kit!

Do not expand or shorten the loom.


Installation instructions

Toyota
2.8 D4D



14110477

overview

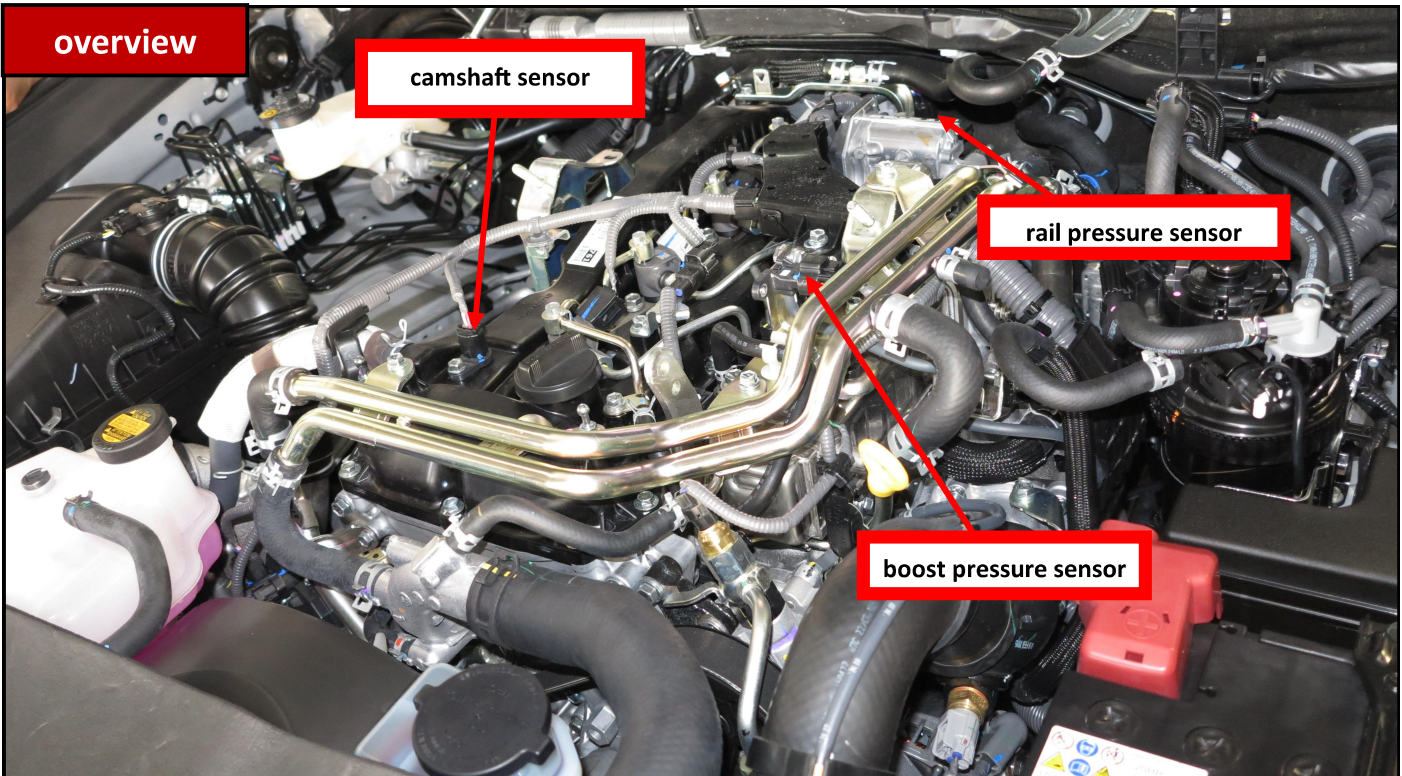

Overview:

The tuningkit has to be attached to the following points:

- Rail pressure sensor
- Boost pressure sensor
- Camshaft sensor

Required tools:

- nothing

Preperation:

- Move the individual strands of the loom to the associated plug connectors
- Put the required tools by your side (if needed)
- Take the fastening material at your side


Installation instructions

Toyota
2.8 D4D



14110477

1a

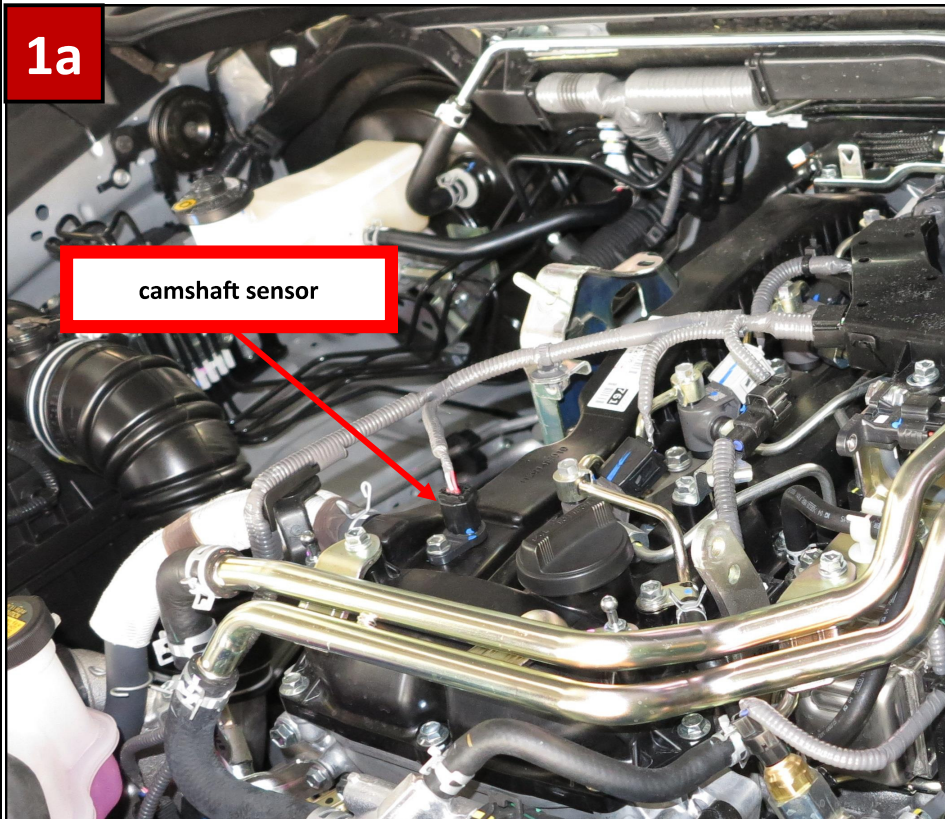


camshaft sensor

1. camshaft sensor

- ◇ Disconnect the plug from the camshaft sensor
- ◇ Attach the camshaft sensor plug to the new loom
- ◇ Connect the plug of the new loom to the camshaft sensor

1b

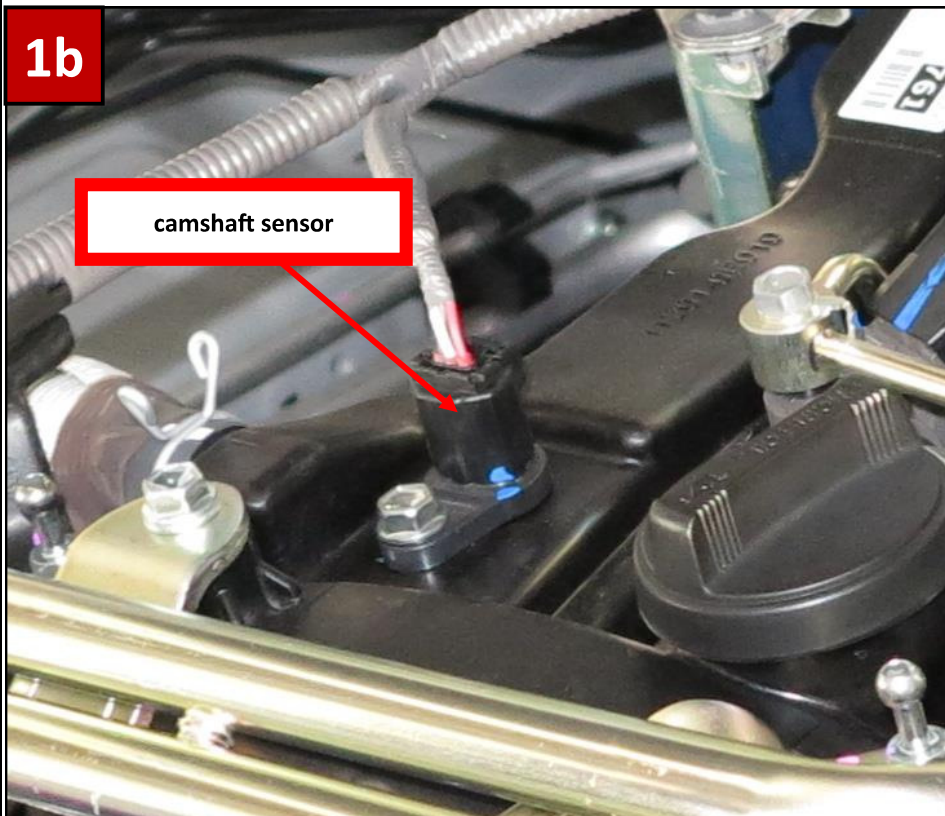

camshaft sensor


Installation instructions

Toyota
2.8 D4D



14110477


2a

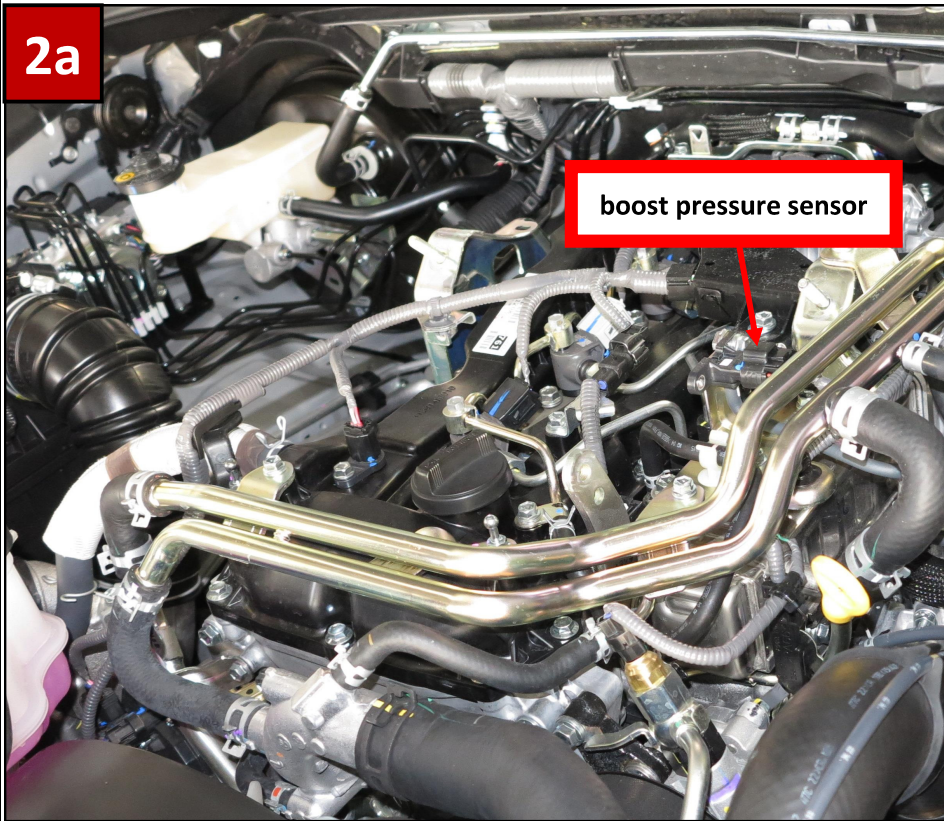

2. boost pressure sensor

- ◇ Disconnect the plug from the boost pressure sensor.
- ◇ Attach the boost pressure sensor plug to the new loom.
- ◇ Connect the plug of the new loom to the boost pressure sensor.

2b

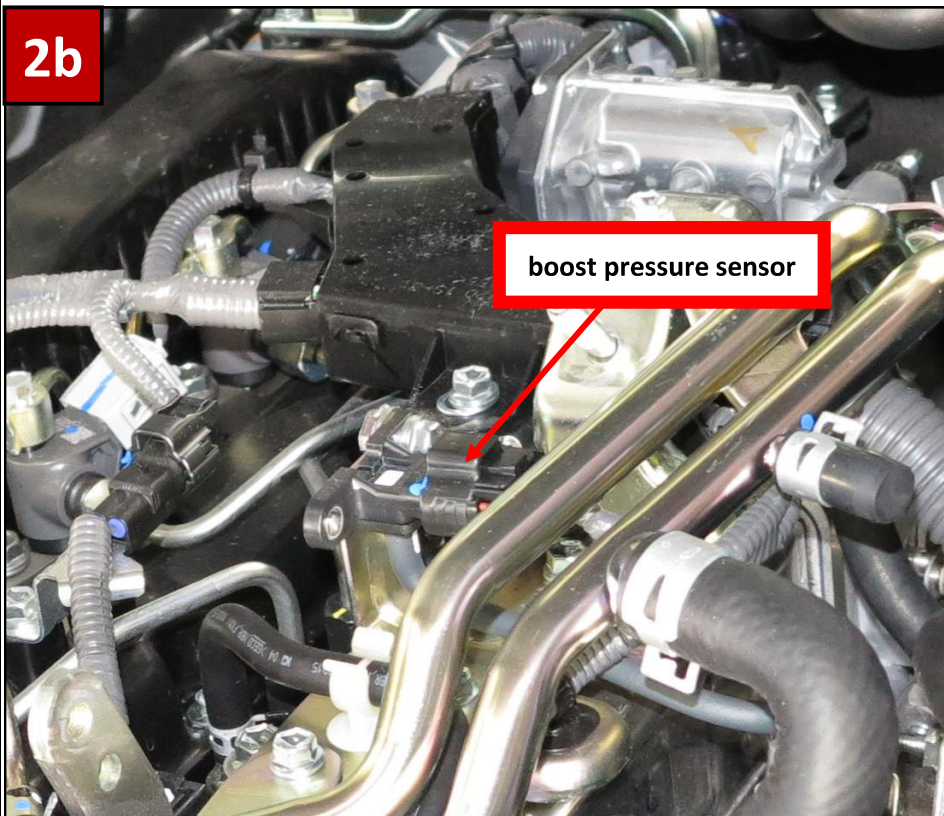


Installation instructions

Toyota
2.8 D4D



14110477

3a

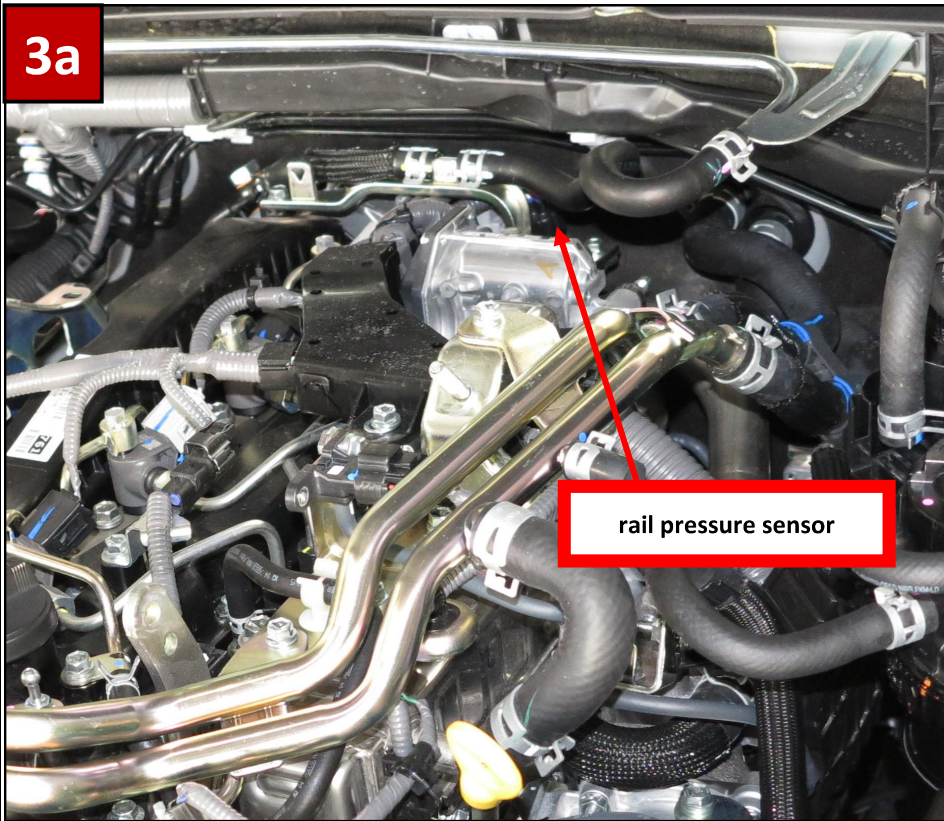


3. rail pressure sensor

ATTENTION!!!

- ◇ The plug is not right on the rail pipe.
- ◇ Disconnect the plug from the rail pressure sensor.
- ◇ Attach the rail pressure sensor plug to the new loom.
- ◇ Connect the plug of the new loom to the rail pressure plug.

3b

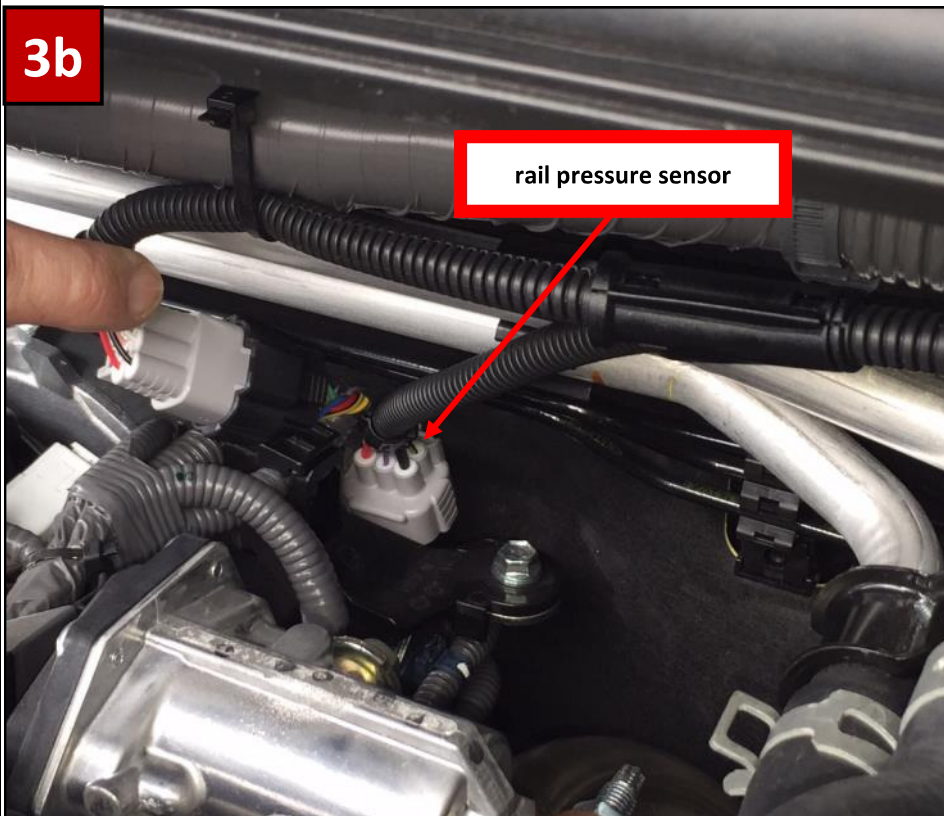


Installation instructions

Toyota
2.8 D4D



14110477


4

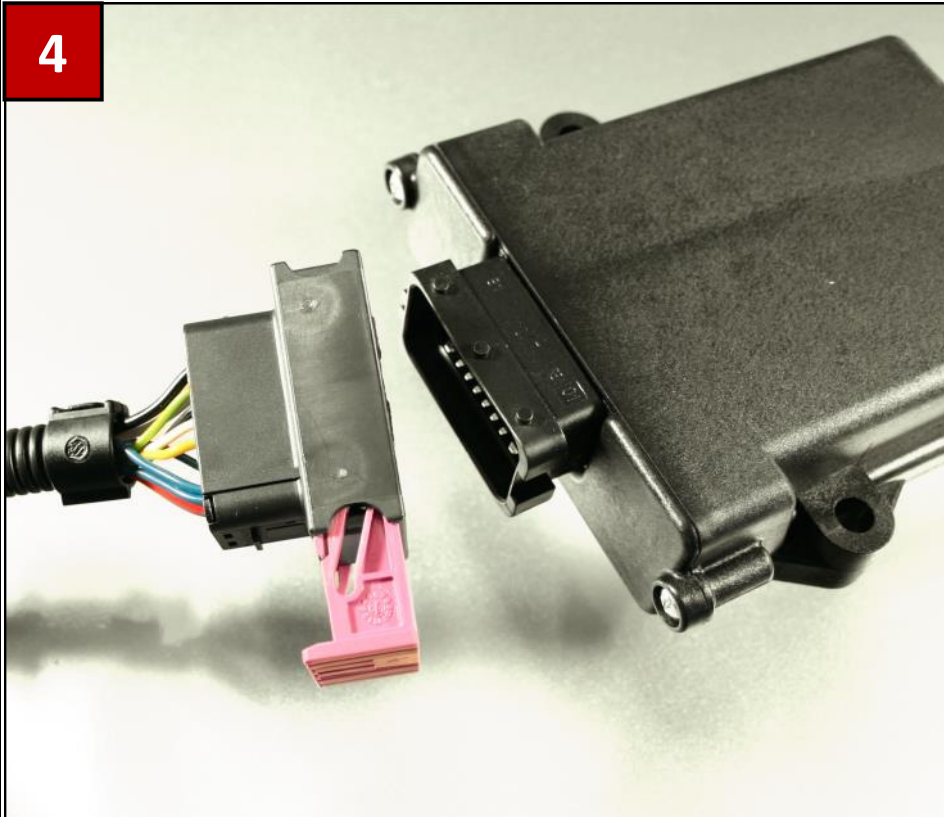

4. tuningbox

- ◇ Finally install the cable towards a suitable position
- ◇ The plugs must be engaged, so that a safe connection is ensured
- ◇ Fix the cable with cable ties
- ◇ Connect the tuningbox to the new loom

5

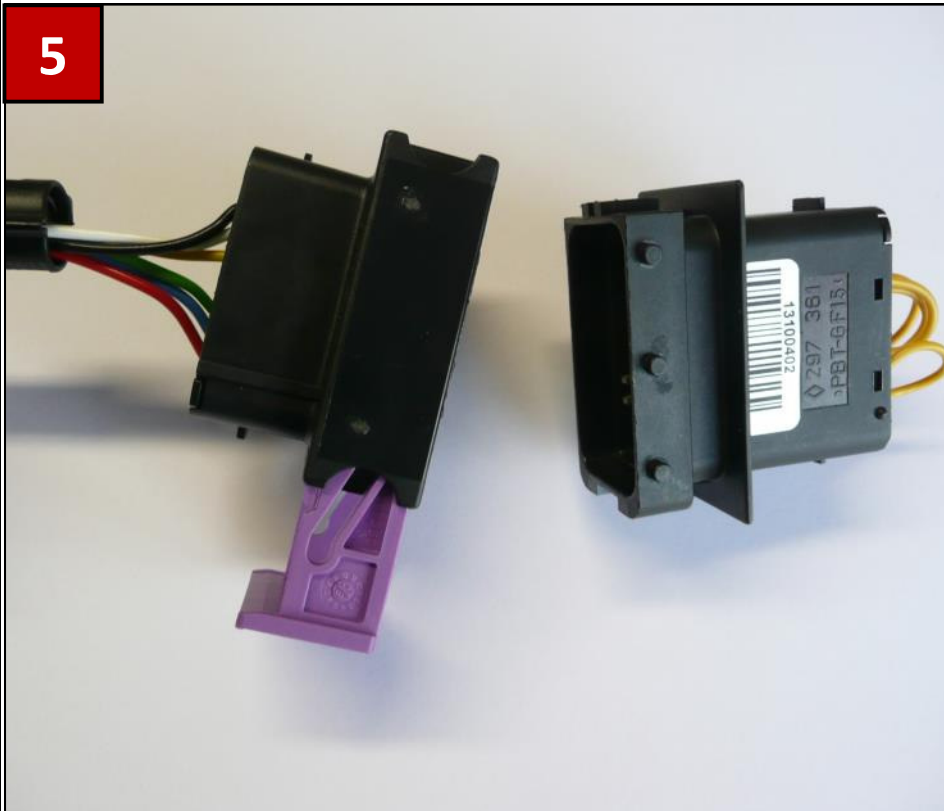

5. jumper plug

- ◇ By using the jumper the vehicle is put in the original condition.
- ◇ As soon as you connect the cable loom with the jumper plug the car is in original condition.