

Installation instructions

VAG 1.4 TSI / TFSI
103 kW 140 PS



The product described in the guidance was developed, manufactured and controlled considering the necessary safety requirements.

The product must be installed properly to ensure a proper function and avoid danger for persons and things.

Please read this installation guide inclusive safety instructions carefully.

Scope of supply:

Quantity	article
1x	Tuningbox
1x	loom
1x	Bridge plug
1x	Fastening kit



1. Open the hood.
2. Turn the ignition off!
3. Remove the ignition key!
4. Close and lock all doors!
5. Do not open any doors while installing the tuning kit!
6. Wait 5 minutes before beginning the installation



In order to avoid damages at electronic vehicle components, you have to be sure that you have done all necessary methods for **electrostatic discharge**.

Install the electronic in an **waterproof** and **vibrationless** place. Do not make any changes at the tuning kit!


Do not expand or shorten the loom.

Installation instructions

VAG 1.4 TSI / TFSI
103 kW 140 PS



OVERVIEW

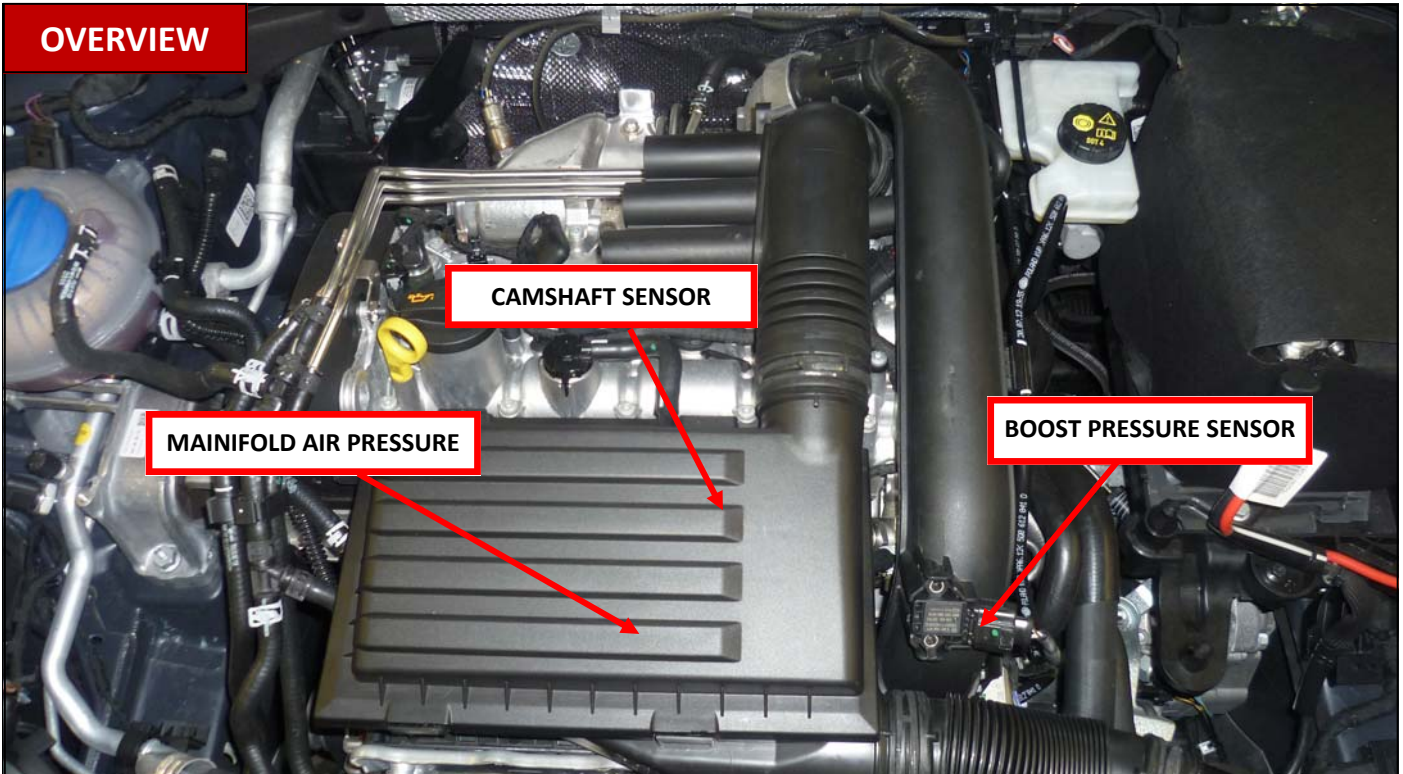

overview:

The chiptuning box is attached to the following points:

- manifold pressure sensor
- camshaft position sensor
- boost pressure sensor

Necassary tools:

- cutters

Preparation:


- Move the individual strands of the cable loom to the associated plug connectors
- Put the necessary tool for the side (if needs)
- Put the mounting material to the side
- ***To reach the maximum power min. Super Unleaded (98 RoZ) or better has to be refueled***

Installation instructions

VAG 1.4 TSI / TFSI
103 kW 140 PS



14109861

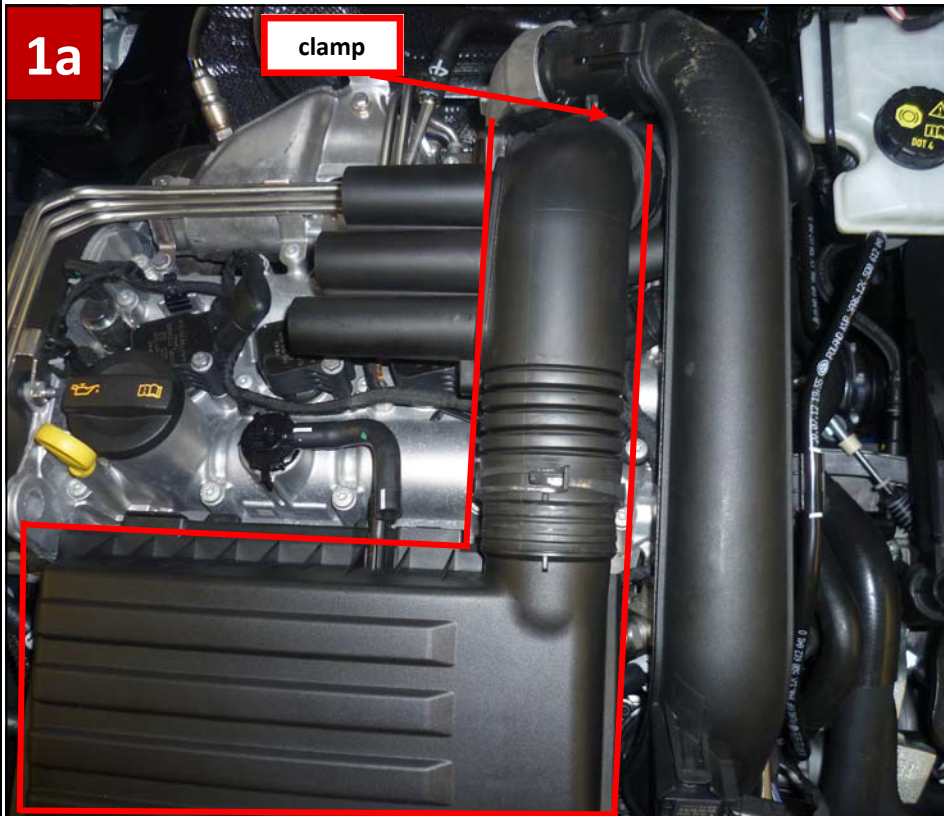

1. preparation

- ◇ Before you begin installation, you must remove the air filter and the inlet hose
- ◇ Loosen the clamp
- ◇ Then carefully pull the air filter and the inlet hose out to the front
- ◇ After disassembly it is easy to reach the camshaft sensor and the intake manifold




Installation instructions

VAG 1.4 TSI / TFSI
103 kW 140 PS




2a

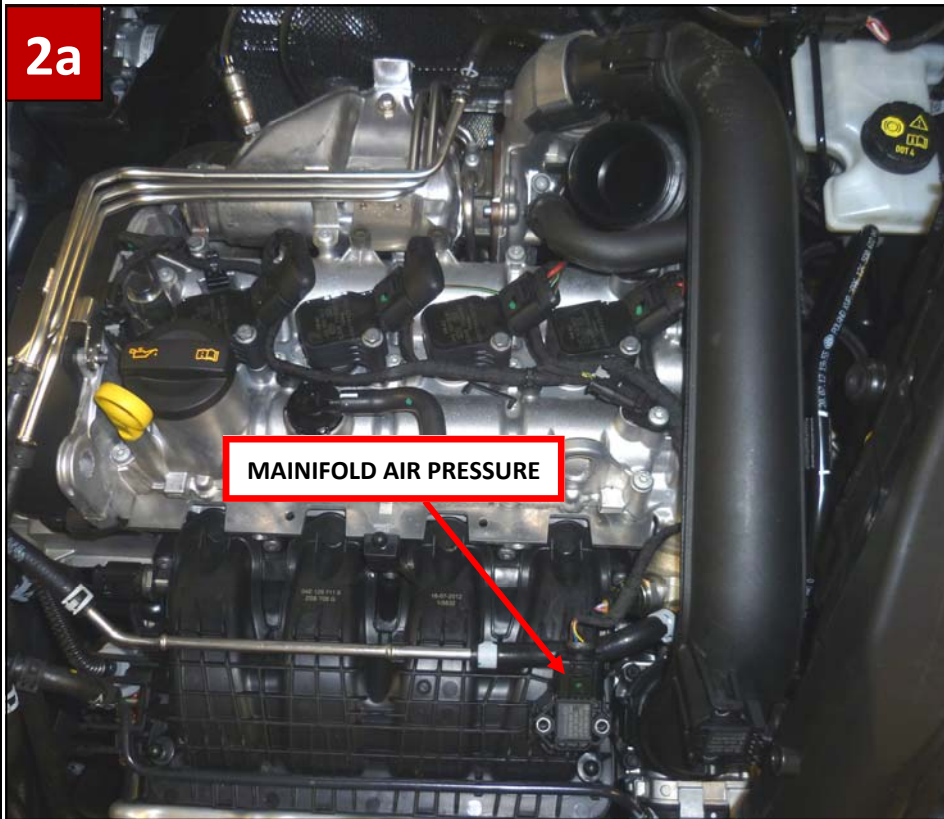

2. manifold air pressure

- ◇ Disconnect the plug from the manifold air pressure sensor.
- ◇ Attach the manifold air pressure plug to the new loom.
- ◇ Connect the plug of the new loom to the manifold air pressure

2b

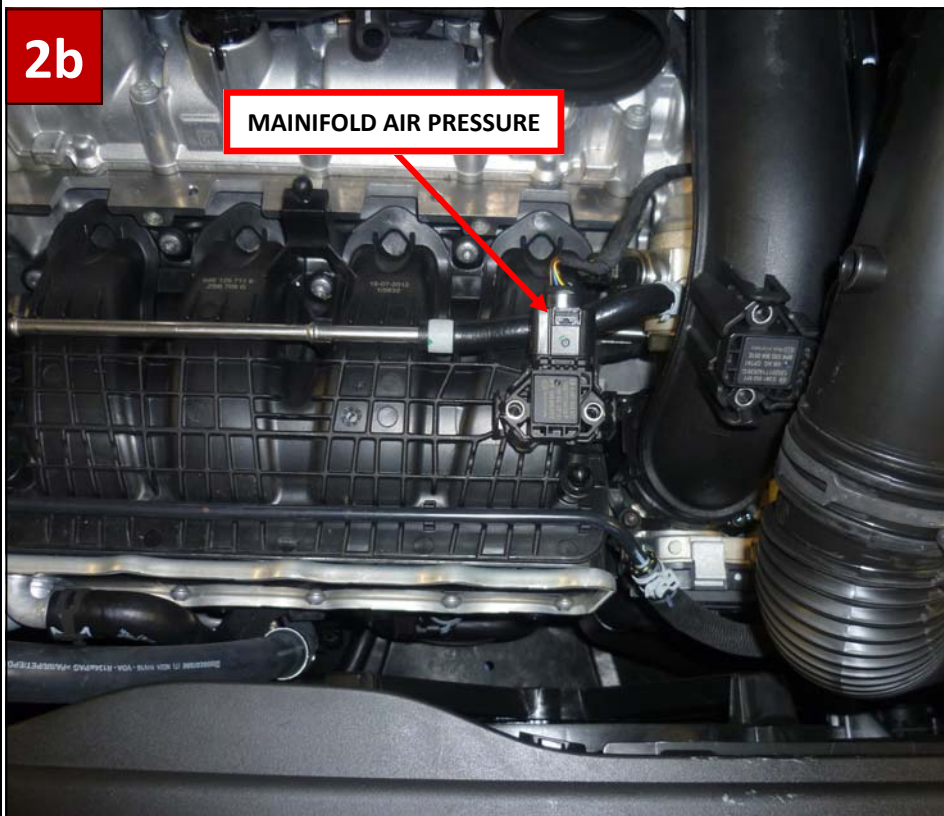


Installation instructions

VAG 1.4 TSI / TFSI
103 kW 140 PS




3a

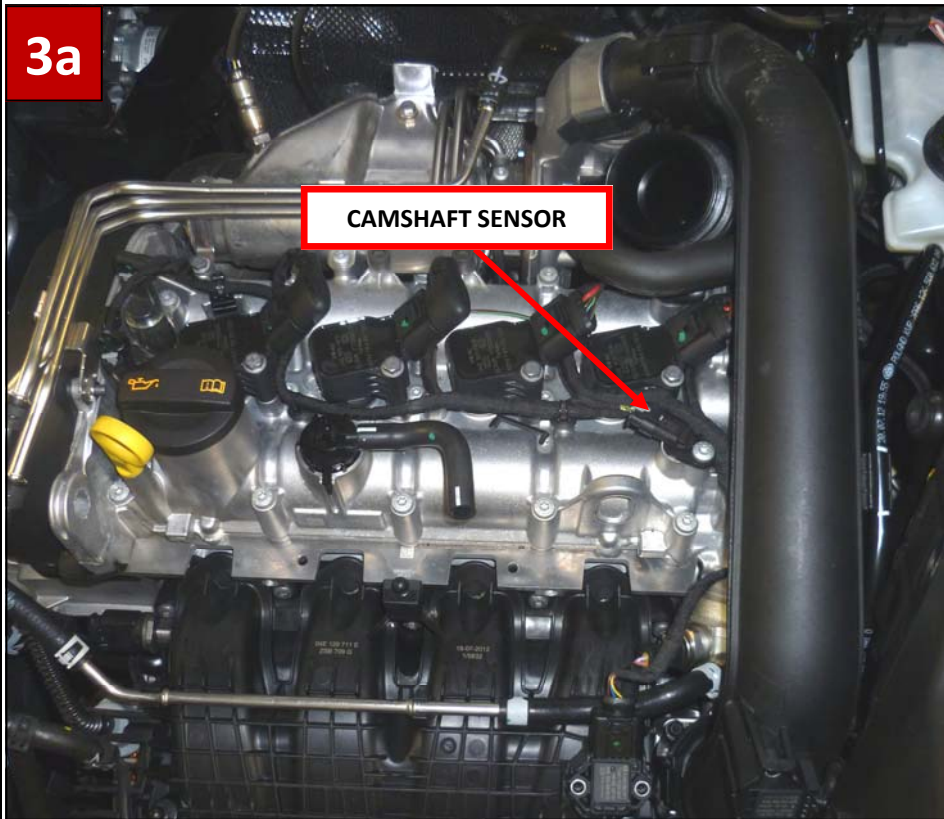

3. camshaft sensor

- ◇ Disconnect the plug from the camshaft sensor .
- ◇ Attach the camshaft sensor plug to the new loom
- ◇ Connect the plug of the new loom to the camshaft sensor

3b

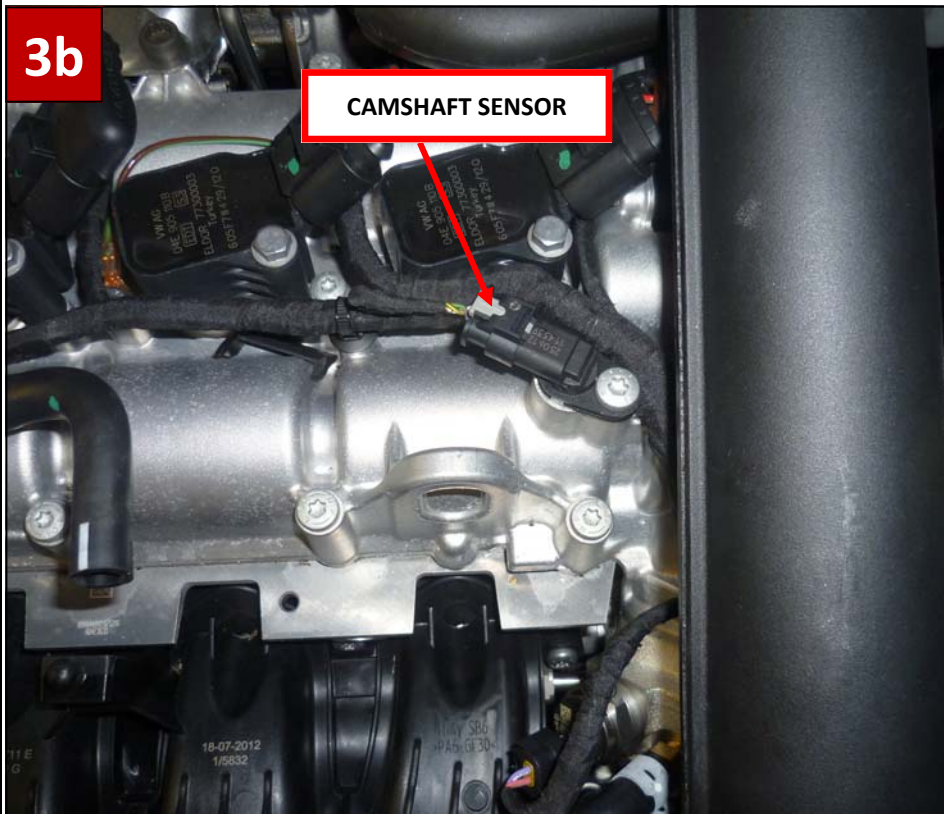

Installation instructions

VAG 1.4 TSI / TFSI
103 kW 140 PS




4a



4. boost pressure sensor

- ◇ Disconnect the plug from the boost pressure sensor
- ◇ Attach the boost pressure sensor plug to the new loom.
- ◇ Connect the plug of the new loom to the boost pressure sensor

4b

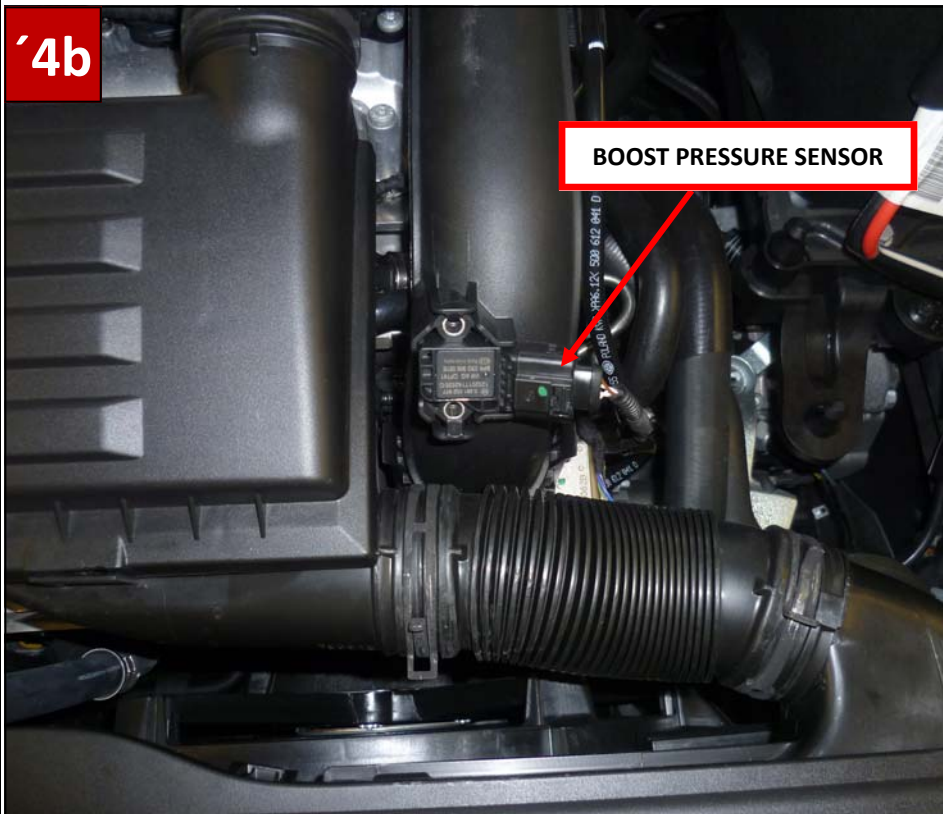


Installation instructions

VAG 1.4 TSI / TFSI
103 kW 140 PS



14109861


5

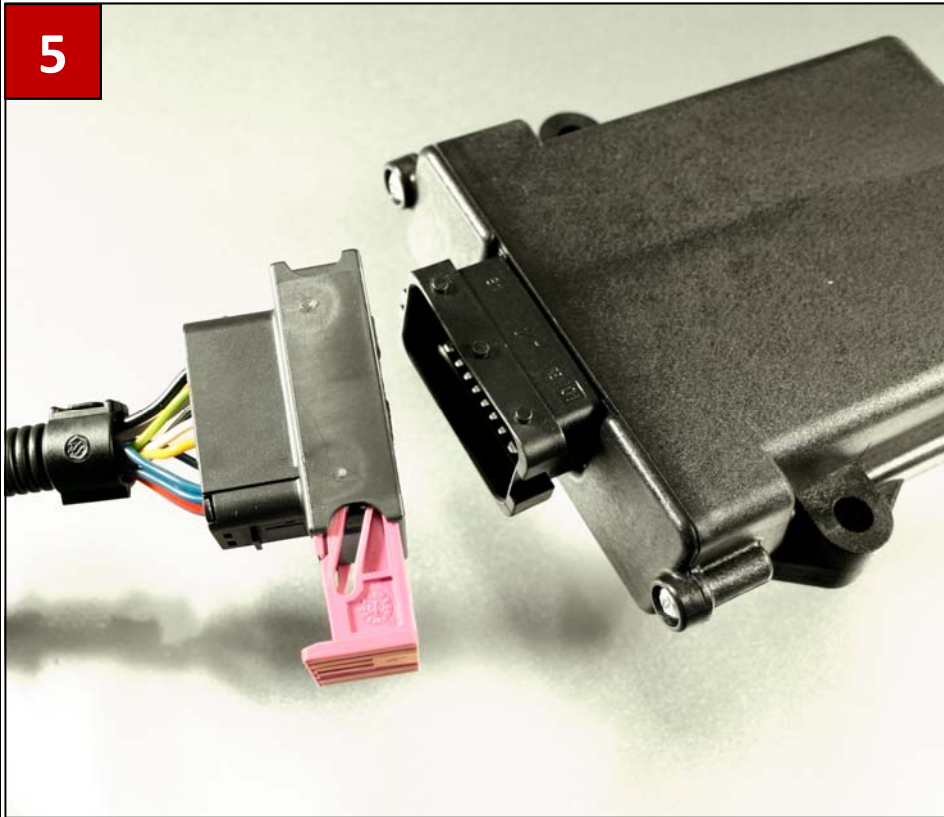

5. tuningbox

- ◇ Finally install the cable towards a suitable position
- ◇ The plugs must be engaged, so that a safe connection is ensured
- ◇ Fix the cable with cable ties
- ◇ Connect the tuningbox to the new loom

6

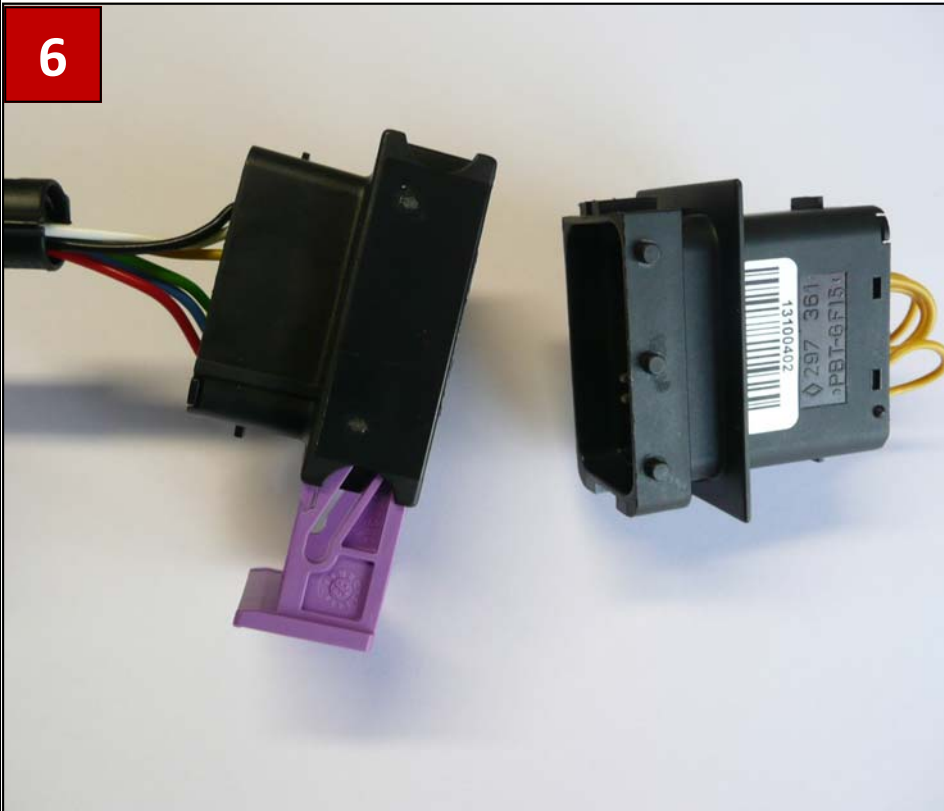

6. jumper plug

- ◇ By using the jumper the vehicle is put in the original condition.
- ◇ As soon as you connect the cable loom with the jumper plug the car is in original condition.